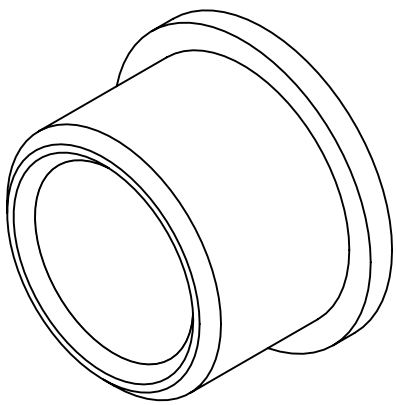
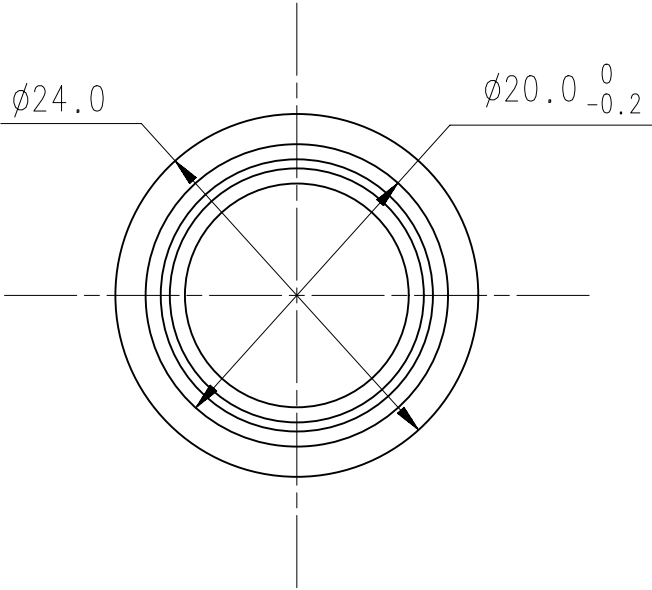
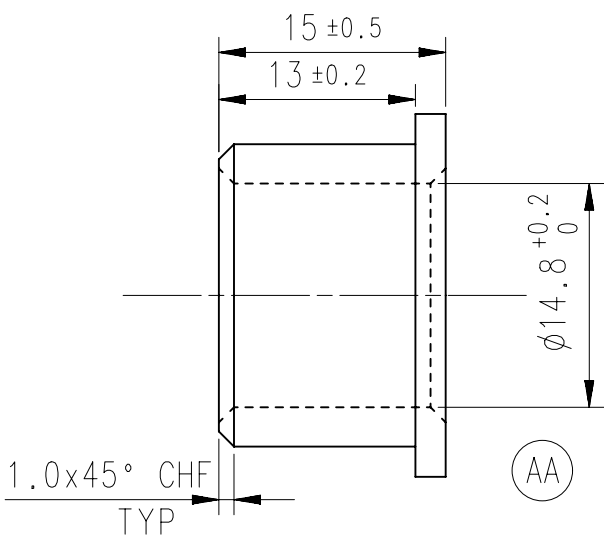


1		2		3		4				
		E.R.NO.		LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE
		ECN12P0 12953		AA		DIM 14.8 WAS 14				30/3/12
		ER14C0002710		AB		PRODUCTION RELEASE	PP	DSK	ST	8/7/14
ISOMETRIC VIEW 										
										
NOTE :- 1. PART MUST BE FREE FROM FRACTURE, BURRS & SHARP EDGES. 2. ALTERNATE MATERIAL EN1A										
<SC>: SIGNIFICANT CHARACTERISTICS ▽:CRITICAL CHARACTERISTICS										
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.						MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI(EAST), MUMBAI 400 101, INDIA.				
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989						E.R. / PROC.REQ.NO : ER14C0002710				
DIMENSIONS						PART NO. : 007541942C1				
L INER IN mm.		OVER	0.5	3	6	30	120	400	1000	2000
		UPTO	3	6	30	120	400	1000	2000	4000
f	FINE (X.XXX)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	
m	MEDIUM (X.XX)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	
c	COARSE (X.X)	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4	
v	VERY COARSE (X)	-	±0.5	±1	±1.5	±2.5	±4	±6	±8	
ANGULAR IN deg.		LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.								
		OVER	-	10	50	120	400			
		UPTO	10	50	120	400	-			
f	FINE (X.XXX)	±1°	±0°30'	±0°20'	±0°10'	±0°5'				
m	MEDIUM (X.XX)	±1°30'	±1°	±0°30'	±0°15'	±0°10'				
c	COARSE (X.X)	±3°	±2°	±1°	±0°30'	±0°20'				
v	VERY COARSE (X)									
PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.						MATERIAL : C20, IS 1570, OR SAE 1020.				
COMPUTER GENERATED DRAWING						HEAT TREATMENT : -----				
DO NOT CHANGE MANUALLY										
IF IN DOUBT, ASK						DO NOT SCALE				
DRG SIZE : A4						ALL DIMENSIONS ARE IN mm.				
CHECK DRG WITH LATEST CHANGE										
1		2		3		4				